




IBC-CONTAINERS



KAUCUBE IBC-CONTAINER

- Long-lasting stainless steel IBC
- UN-certified for packaging groups II & III, type 31A
- Stacks up to three units high
- Four-way fork or pallet truck handling and top lift compatible
- Includes high-quality industry standard fittings for bulk liquid
- Tare weight: 140 - 200 kilograms
- 400 mm manlid
- 1 off fill and test sockets
- Food grade finishing on request

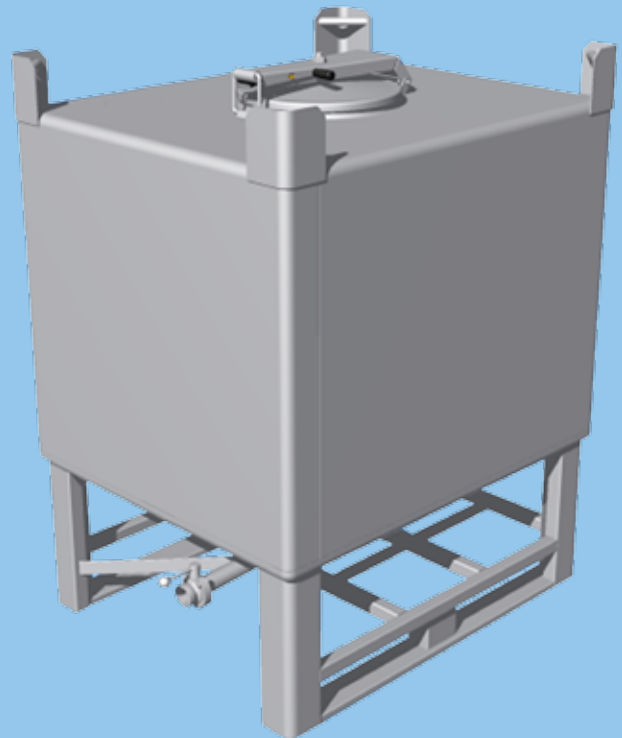

*Solve your transportation problems with Kaucon...
...leaders in metal Multi-Trip IBC development.*

Contact us for more information!

Kaucon Oy
Uurontie 8
FI-80770 Kontiolahti
Finland
Tel. +358 (0)13 732 332
Fax +358 (0)13 732 084

info@kaucon.com | www.kaucon.com

Intermediate Bulk Containers

KAUCUBE IBC-CONTAINER

Tank Shell	2.5 mm 304 grade stainless steel with 2B internal finish suitable for chemical use. 316 available upon request.								
Capacity	500, 800, 1000 and 1200 Lts								
Base Frame & Size	304 grade stainless steel throughout, including bolting – natural finish, maintenance free. Frame dimensions: Base 1000 mm x 1200 mm Height: <table style="margin-left: 200px; border: none;"> <tr> <td>500 lts</td> <td>800 mm</td> </tr> <tr> <td>800 lts</td> <td>1090 mm</td> </tr> <tr> <td>1000 lts</td> <td>1240 mm</td> </tr> <tr> <td>1200 lts</td> <td>1435 mm</td> </tr> </table>	500 lts	800 mm	800 lts	1090 mm	1000 lts	1240 mm	1200 lts	1435 mm
500 lts	800 mm								
800 lts	1090 mm								
1000 lts	1240 mm								
1200 lts	1435 mm								
Manlid	Diam. 400 mm spun type, six point fixing with hinge. Seal material EPDM. Other options available.								
Sockets	1 x 2.0" BSP sockets, with a female connection and bung.								
Relief Valve	A 1" BSP pressure / vacuum relief valve set at 0.34 bar pressure and 0.1" Hg vacuum.								
Outlet	A 2" nominal bore 304 stainless steel outlet pipe emanating from a fully drainable dished sump with a 2" lockable ball valve and PTFE seal, terminating in a 2" kamlok- type coupling with a drip cap. Optional valve and connector arrangements available.								
Markings	UN certification plate and manufacturer's plate, plus a unique code number.								
Labeling	Optional Hazchem board holder.								
Handling	Four-way forklift truck entry and top lift fittings.								
Stacking	Up to three units high when full.								
Certification	UN Chapter 16 for packaging groups II and III, type 31A.								
Periodic Test	0.2 bar pressure test every 2.5 years.								
Max Specific Gravity	1.5								



Kaucon Oy
Uurontie 8
FI-80770 Kontiolahti, Finland
Tel. +358 (0)13 732 332
Fax +358 (0)13 732 084

info@kaucon.com | www.kaucon.com