




IBC-CONTAINERS



*Secure liquid storing and transporting
in extreme hostile environment.*

SAFECUBE IBC-CONTAINER

- Long lasting steel IBC
- Double skin construction on the sidewalls and the bottom, shielding against bullets and shrapnel
- UN-certified for packing Groups II & III, type 31A
Stacks up three units
- Four-way forklift or pallet truck handling and top lift compatible
- Includes high-quality industry standard fittings for bulk liquids
- 400 mm manlid, pressure/ vacuum release valve
- Charging and draining on top, no bottom outlet valve

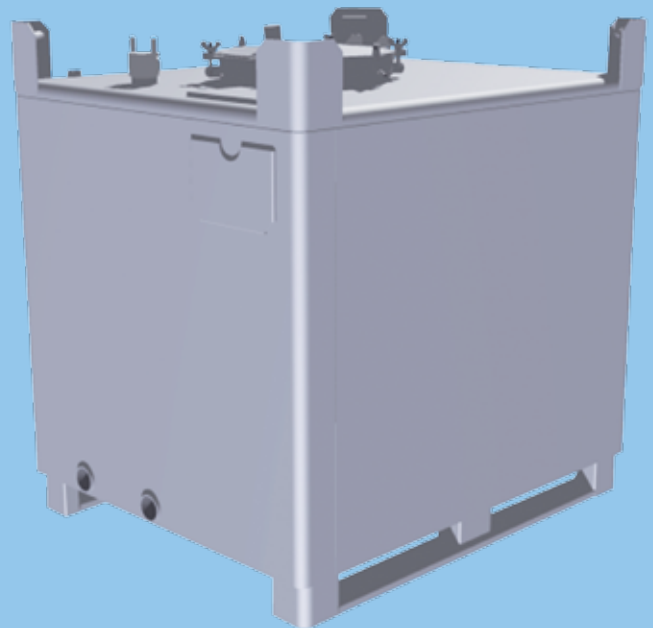

*Solve your problems with Kaucon,
NATO NGAGE-supplier A414G...
...leaders in metal Multi-Trip IBC development.*

Contact us for more information!

Kaucon Oy
Uurontie 8
FI-80770 Kontiolahti
Finland
Tel. +358 (0)13 732 332
Fax +358 (0)13 732 084

info@kaucon.com | www.kaucon.com

Intermediate Bulk Containers

SAFECUBE IBC-CONTAINER

Ref code	SafeCube SC500...SC1200
Nato NSN	5411580000932 for 500 Lts capacity, height 925 mm 5411580000933 for 800 Lts capacity, height 1120 mm 5411580000934 for 1000 Lts capacity, height 1250 mm 5411580000935 for 1200 Lts capacity, height 1380 mm
Tank Shell	3 mm carbon steel, or 2,5 mm ss304, ss316 stainless steel outer finish powder coating to Nato camo standard, single colour.
Base Frame & Size	Self standing construction, base 1000 x 1200 mm. Diam 400 mm spun type manlid, six point fixing with hinge, seal material nitrile. Other options available.
Sockets/ outlet	2" kamlok socket on top for draining, 2" socket for charging. Other options available.
Relief Valve	A 1" BSP Pressure/ vacuum relief valve set at 0.34 bar pressure and 0.1" Hg vacuum.
Markings	UN certification plate and manufacturer`s plate.
Handling	Four-way fork lift entry and top fittings.
Stacking	Up to three when full.
UN-certification	UN Chapter 16 for packing groups II and III.
Shielding	According to 1.1 g FSP, STANAG 2920, side walls and bottom.
Max SG	1.8



Kaucon Oy
Uurontie 8
FI-80770 Kontiolahti, Finland
Tel. +358 (0)13 732 332
Fax +358 (0)13 732 084

info@kaucon.com | www.kaucon.com